

# ECOFONT

## COMPOSITION

(from outside to inside):


- Gelcoat RAL 9010
- Glass Reinforced Polyester
- High density PET recyclable foam
- Glass Reinforced Polyester
- White Gelcoat

## APPLICATIONS:

- Industrial bodywork, LUV, mobile shops, bus
- Containers
- Advertising
- Food industry, cold chambers, cladding
- Building industry, partition walls, ceilings

## OPTIONS:

- Color gelcoat on outside face
  - Adhesive protection foil
  - Dimensions on request
  - Reinforced construction (x)
  - Placing of inserts on request
- 
- Maximum width 2400 mm
  - Maximum length 11900 mm

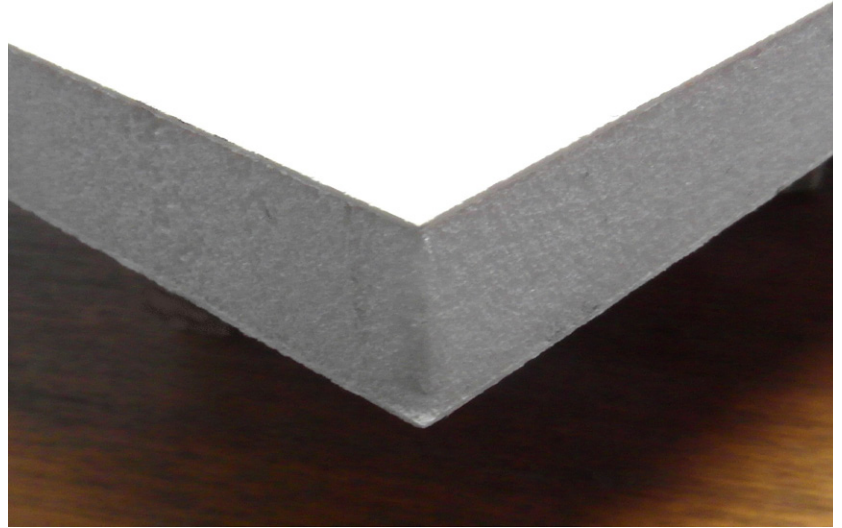

THICKNESSES	WEIGHT	GLASS WEIGHT	K VALUE	PART NUMBER
12 mm	5.1 kg/m <sup>2</sup>	1300 g/m <sup>2</sup>		EFO12S
14 mm	4.6 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	2.6 W/m <sup>2</sup> -°C	EFO14S
17 mm	4.9 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	2.14 W/m <sup>2</sup> -°C	EFO17S
20 mm	5.1 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	1.79 W/m <sup>2</sup> -°C	EFO20S
25 mm	5.5 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	1.4 W/m <sup>2</sup> -°C	EFO25S
30 mm	5.9 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	1.28 W/m <sup>2</sup> -°C	EFO30S
50 mm	7.6 kg/m <sup>2</sup>	1400 g/m <sup>2</sup>	0.61 W/m <sup>2</sup> -°C	EFO50S