ESELON SERIES EURO PROFILE CYLINDER SWING HANDLE

IP65 RATED

FEATURES:

- Vandal resistant
- Park position with "click"
- Sleek, modern design
- Suits 40mm profile cylinders
- IP65 rated
- 90° left & right stopper

DIMENSIONS:

Shaft	Length = 68mm	
	Square size = 8mm	

MATERIAL & FINISH:

Handle	Zinc die
Base	Zinc die
Shaft	Mild steel, Zinc plated

STANDARD CAMS AVAILABLE:

- <u>1000-1586</u> Single point
- <u>1000-1587 3 point with adapters</u>
- <u>1000-1588 3 point without</u> <u>adapters</u>
- <u>1000-1592</u> Internal handle
- P2535 Emergency internal handle
- Roller cams refer to page 3-1


PROFILE CYLINDER:

Shaft


Length = 68



SELECTLOK



SELECTRIN® cut out

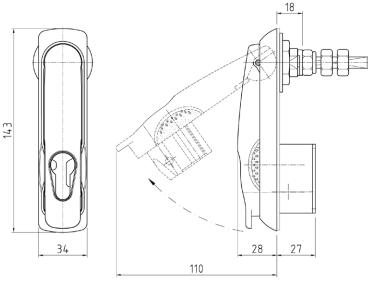

MAXIMUM OPENING

BASE FINISH	HANDLE FINISH	PART NUMBER
Black EDP coated	Black EDP coated	1107SBBU3N
Black EDP coated	Chrome plated	1107SBCU3N
Chrome plated	Chrome plated	1107SCCU3N

SECTION 5-3

Please note: Selectlok/Selectrix reserves the right to alter designs and dimensions without notice. ©Selectrix Industries Pty Ltd and Selectlok NZ Limited.