

ALUMINIUM PROFILE HINGE

Black Anodised

Pre-Drilled Holes

Features

- 180° opening angles
- Pre-drilled holes: 4.0mm (dia.) x 200mm spacing (stepped/offset to the opposing face)
- Temperature range -40°C to +80°C
- Hydrolysis and bacteria resistant
- Contact us for custom lengths, sizes and hole spacings
 - Additional costs, leadtimes or MOQ's may apply

Dimensions, Materials & Finish

- Material & Finish:
 - Aluminium profile - EN AW-6063
 - Anodised finish - EV6, matt black
 - Elastomer profile - Polyurethane elastomer plastic (TPU), black

Remarks

- Packing: 2x off in sealed plastic wrapping





Part Number	Description	Profile Length	Holes (A Profile)	Holes (B Profile)
NP0012-2-2000	Aluminium Profile Hinge, Black Anodised	2,000mm	9 Holes	10 Holes
NP0012-2-2400	Aluminium Profile Hinge, Black Anodised	2,400mm	11 Holes	12 Holes
NP0012-2-3000	Aluminium Profile Hinge, Black Anodised	3,000mm	14 Holes	15 Holes


ALUMINIUM PROFILE HINGE

Black Anodised

Pre-Drilled Holes

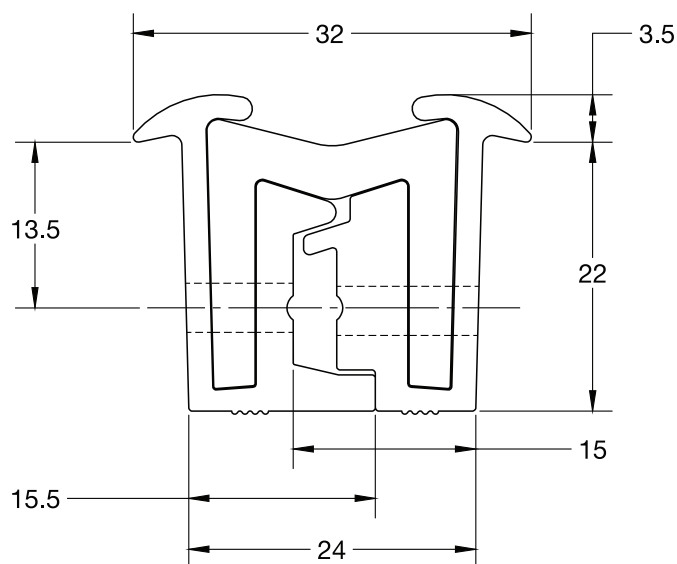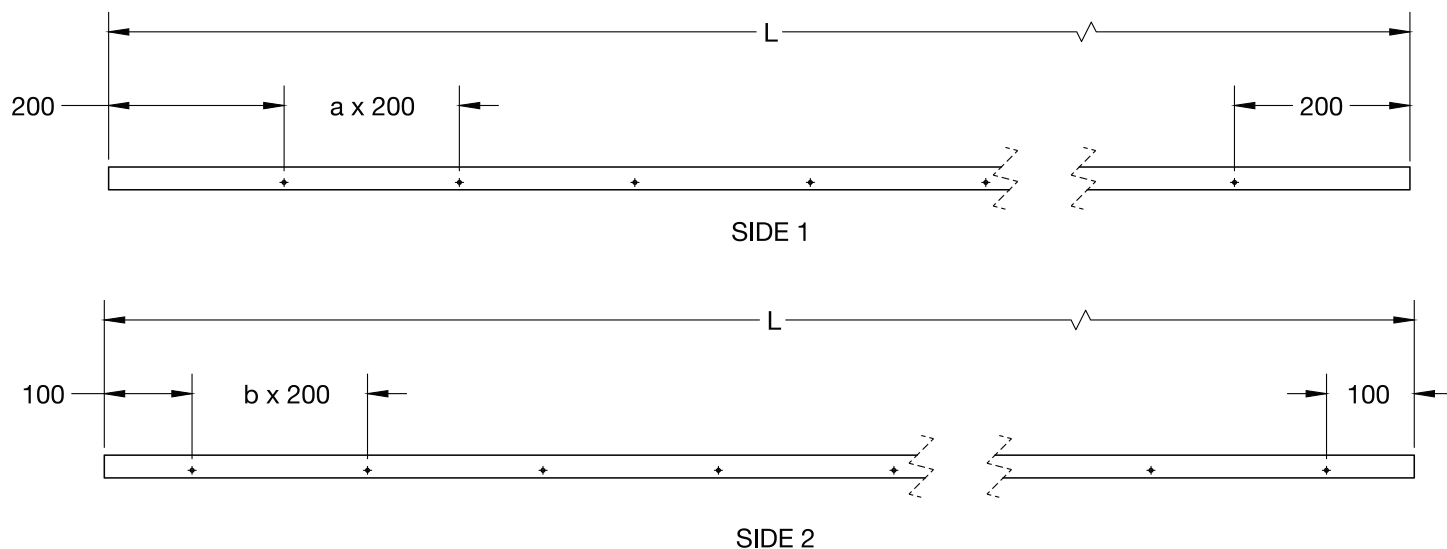

Part Number	L (mm)	(a)	(b)
NP0012-2-2000	2000	9	10
NP0012-2-2400	2400	11	12
NP0012-2-3000	3000	14	15

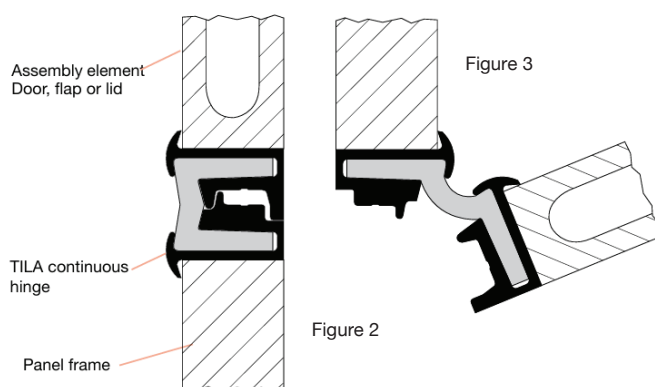

Suggested Installation: Non-binding - Particularly important for flaps and lids. The 180° continuous profile hinge should be installed as shown in figure 2 and 3.
Note: the correct arrangement of the various aluminium clamping profiles on the panel and assembly element.