

# SELECTLOK®



## QUICK REFERENCE GUIDE

# Touring & RV Industry Manufacturers

### QLD | NT

Laurel Nilsen  
0401 989 235

[lnilsen@selectlok.com.au](mailto:lnilsen@selectlok.com.au)

### NSW | ACT

Daniel Korman  
0401 989 000

[dkorman@selectlok.com.au](mailto:dkorman@selectlok.com.au)

### VIC | TAS

Justin Newitt  
0416 656 695

[jnewitt@selectlok.com.au](mailto:jnewitt@selectlok.com.au)

### WA | SA

Andrena Winning  
0423 569 543

[awinning@selectlok.com.au](mailto:awinning@selectlok.com.au)



Selectlok began as a small family business in the suburbs of Preston, Victoria in 1978. We now call Tullamarine, Victoria our home, with sales representatives across all of Australia servicing our clients needs.

We work directly with manufacturers to create innovative industrial hardware solutions, and are a driving force for creating ingenious solutions specifically for the Australian market.

Our in-house products and distributed ranges use only the highest quality manufacturing processes and materials. That's why we are trusted by the biggest manufacturers in Australia.



**HEAD OFFICE | CUSTOMER SERVICE**

13 TREVI CRESCENT, TULLAMARINE, VIC 3043

**TEL** (03) 8318 4900

**EMAIL** SALES@SELECTLOK.COM.AU

Cover Image:

📺 📷 | team.unprepared

v2406\_01



**DISCOVER MORE ONLINE**

[www.selectlok.com.au](http://www.selectlok.com.au)



## DIRAK HEAVY DUTY LATCH SYSTEM FOR RV & HVAC APPLICATIONS

PART NO. & BOX QTY: Contact us for more information

- ▶ Wide variety of customisable configurations available
- ▶ Suitable for different door-thicknesses
- ▶ IP65 according to DIN EN 60529 by sealing kit (optional)
- ▶ Lockable handles, keyed alike, are equipped with stainless steel dust-shutter
- ▶ **Handle:** PA, black or PA, black / steel, zinc plated, **Insert:** zinc die, chrome plated

## GAS STRUTS

BOX QTY: 50 (Can be purchased individually)

Our high-quality gas struts are available in extended lengths from 195mm to 920mm that provide mechanical assistance for lifting and supporting various trailer components.

- ▶ Available in different shaft widths, based roughly on extended length
- ▶ Various pressures to match the weight requirements of your strut
- ▶ Plastic quick-fit ends on 6mm and 8mm shafts (Steel ends available), Steel ends on 10mm and 12mm shafts.
- ▶ QPQ Coating on shaft increases protection from corrosion, chipping or dust

EXT. LENGTH	SHAFT WIDTH	PRESSURE
195 - 920mm	6mm   8mm   10mm   12mm	Up to 1700 newtons (N)



## DRAWER SLIDES

PART NO. (PLEASE CONTACT US)

BOX QTY: Sold in pairs

- ▶ Available in locking and non-locking variants
- ▶ Available in different load ratings, based on extended length (locking adds 25mm)
- ▶ Note: does not come with fixing screws
- ▶ Durable damping system



LOAD RATING	EXT. LENGTH	FEATURES
45kg Soft Closing / Light Duty	300mm - 600mm (L) 45mm (H) 12.7mm (W)	Leaver Disconnect
125kg Medium Duty	350mm - 1000mm (L) 53mm (H) 18.7mm (W)	Leaver Disconnect
227kg Heavy Duty	400mm - 1800mm (L) 75.3mm (H) 19.5mm (W)	No Leaver Disconnect

## TILA ALUMINIUM PROFILE HINGE

PART NO. (REFER TO TABLE)

- ▶ Maintenance Free
- ▶ Hydrolysis and bacteria resistant
- ▶ Pre-drilled holes (4mm dia with 100mm intervals,) 20mm wide mounting face
- ▶ Aluminium profile - AlMgSi 0.5 anodised, E6 EV1, polyurethane elastomer profile

PART NO.	LENGTH	HINGE WEIGHT	TEMP RANGE
631218	1800mm	2.05kg per hinge	-40°C to +80°C
631222	2200mm	2.50kg per hinge	-40°C to +80°C
631224	2400mm	2.75kg per hinge	-40°C to +80°C
631227	2700mm	3.10kg per hinge	-40°C to +80°C







### FLUSH PULL RING LATCH

PART NO. ABLU01B

BOX QTY: Sold individually

- ▶ Non-lockable, slam latch
- ▶ Suits panel thickness 1mm-6mm
- ▶ ABS plastic, nylon



### FLUSH PULL RING LATCH - S/S 316

PART NO. ABTU01B

BOX QTY: Sold individually

- ▶ Key lockable, slam latch
- ▶ Suits panel thickness 1mm-10mm
- ▶ Polished marine grade - S/S 316




### RUBBER DOOR SEAL CORNER TABS

PART NO. P2627

BOX QTY: 100 pieces

- ▶ 80mm (L) x 20mm (W) x 2mm (H)
- ▶ **Material:** PVC, **Colour:** Grey



### REAR DOOR RUBBER H-SEAL

PART NO. P-200-21

BOX QTY: 50m (10 x 5m lengths)

- ▶ 21mm grip range
- ▶ **Material:** PVC, **Colour:** Grey



### V3 MIDNIGHT MAX & V3 MIDNIGHT MAX MINI WHALE TAIL HANDLES

PART NO. (REFER TO TABLE)

BOX QTY: 16 (Can be purchased individually)

- ▶ IP65 rated, zinc die cast, stainless steel main shaft
- ▶ Available in Black & Chrome
- ▶ Also available in half-euro profile key cylinder
- ▶ MINI version is 30% smaller than full-sized
- ▶ Compatible with single (adjustable roller cam) or multi-point locking

COLOUR	HANDLE SIZE	PART NUMBER
Chrome	V3 Midnight <b>MAX</b>	10506M-SK#-ZCC-R
Black	<b>Full-Sized</b> Whale Tail	10506M-SK#-ZBB-R
Chrome	V3 Midnight <b>MAX</b>	10507M-SK#-ZCC-R
Black	<b>MINI</b> Whale Tail	10507M-SK#-ZBB-R



### DIRAK BRIDGE HANDLE - STEEL TUBE Ø30MM

PART NO. & BOX QTY: Contact us for more information

- ▶ Steel tubes: steel, PVC with steel spring core
- ▶ Supports: PA, black
- ▶ Steel tube Ø30mm available in the following lengths: 266mm/366mm/466mm/566mm/766mm & 2500mm
- ▶ Supports available as end pieces, wall ends, center & LH/RH bent supports



### DIRAK SMALL OVAL WINDOW

PART NO. 251-9101.00-00000

Contact us for more information

- ▶ 140mm (W) x 280mm (L) x 16mm (D)
- ▶ **Window:** polycarbonate PC
- ▶ **Self-adhesive seal:** EPDM cell sponge rubber
- ▶ 4x holes for flat head screw M5



### DIRAK SMALL SQUARE WINDOW

PART NO. 251-9102.00-00000

Contact us for more information

- ▶ 110mm (W) x 110mm (L) x 14.5mm (D)
- ▶ **Window:** polycarbonate PC, **O-ring:** NBR
- ▶ Clip-in, for door-thickness 0.8 to 2.5mm
- ▶ IP65 with o-ring, according to DIN EN 60529



### COMPRESSION HANDLE (LARGE & SMALL)

PART NO. (REFER TO TABLE)

BOX QTY: 36 (Can be purchased individually)

- ▶ Bracket: Mild steel & Zinc plated / Cam: Zinc
- ▶ Grip range varies - contact your Selectlok representative
- ▶ Other finishes & grip ranges available - contact us for more

HANDLE FINISH	PART NUMBER
Chrome plated (Large)	10207-CH510
Black powder coat (Large)	10207A-CH510-BLK
Chrome plated (Small)	10208-CH510
Black powder coat (Small)	10208-CH510-BLK



### POLYAMIDE D-PULL HANDLE

PART NO. DHPA20

BOX QTY: Sold individually

- ▶ 137mm (W) 37mm (H)
- ▶ Mounting for M6 hex bolts
- ▶ Suitable for outdoor applications



### 166MM S/S SPRING BOLT

PART NO. 9156-SS

BOX QTY: 50

(Also purchased individually)

- ▶ 316 stainless steel
- ▶ 120 degree opening
- ▶ 166mm (L) x 12mm (D)



### OVER CENTRE FASTENER AND HOOKS - 304 S/S

PART NO. (REFER TO TABLE)

- ▶ Please consult our website, for exact dimensions
- ▶ Hook and fastener sold separately
- ▶ Also available in zinc plated, mild steel




### PLASTIC DOOR RETAINER

PART NO. 631800

BOX QTY: Sold individually

- ▶ White plastic with SS spring
- ▶ 4x longitudinal fixing holes (10x5mm)
- ▶ 65mm (L) x 29mm (W) x 44.5mm (H)

SIZE	LATCH PART NUMBER	HOOK PART NUMBER
Small	92106SS	92106-1SS
Medium	92105SS	92105-1SS
Large	92104SS	92104-1SS

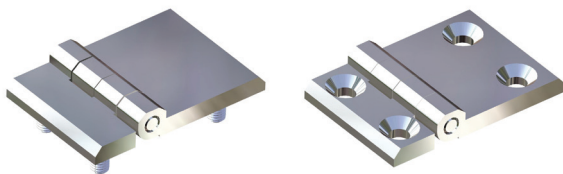

### HEAVY DUTY INDUSTRIAL SCREW ON HINGE

PART NO. & BOX QTY: Contact us for more information

- ▶ For flush mounted doors
- ▶ Zinc die cast with 304 stainless steel pin
- ▶ High quality black powder coated OR chrome plated
- ▶ Variety of widths and lengths available
- ▶ available in both front fixing (countersunk) & rear fixing (studs)



### ENERDRIVE B-TEC 12V 125Ah G2 LITHIUM BATTERY

PART NO: EPL-125BT-12V

- ▶ 5 Year Warranty
- ▶ >2500 Charge Cycles @ 80% DOD
- ▶ Bluetooth Monitoring via Phone App
- ▶ Built-In Reset Button for re-starting a flat battery
- ▶ 125Ah Lithium = 200Ah AGM

## CONTACT US FOR MORE ENERDRIVE PRODUCTS!



### ENERDRIVE ePOWER 1000W/12V PSW INVERTER

PART NO: EN1110S

- ▶ Australian GPO Outlets
- ▶ True sine wave output
- ▶ Includes 5V USB port
- ▶ High surge capacity for products that require more power
- ▶ Automatic shutdown protects overload, over temperature and low/high battery conditions



### ENERDRIVE 12V 40A+ DC2DC BATTERY CHARGER

PART NO: EN3DC40+

- ▶ Fully programmable LCD display
- ▶ Fully automatic multistage smart charging process
- ▶ Vehicle input allows for either 12 or 24v and a maximum solar input of 45V/800W
- ▶ Two totally independent DC Inputs for both engine & solar regulation charging, one house battery bank output



### ENERDRIVE 190W FIXED MONO SOLAR PANEL (SILVER OR BLACK FRAME)

PART NO: SP-EN190W, SP-EN190W-B

- ▶ Enerdrive solar panels are typically around 20+vdc open circuit and are well suited to 12v installations (or 24v by series connections of panels).



**SELF-ADHESIVE RUBBER, TOP MOUNT  
3M ADHESIVE**

PART NO. 9187STS

BOX QTY: 1 x 50m roll

► Profile: 18mm x 18mm



**RUBBER CLOSED CELL  
PVC NITRILE FOAM**

PART NO. NITFT25X6

BOX QTY: 12 x 12.5m rolls

► Profile: 25mm x 6mm



**RUBBER EDGE PROTECTION  
LARGE PROFILE**

PART NO. 1011-10803

BOX QTY: 1 x 100m roll

► Grip Range: 1.0 - 4.0mm



**RUBBER PINCHWELD, SIDE MOUNT  
MEDIUM BUBBLE**

PART NO. 1011-106

BOX QTY: 2 x 50m rolls

► Grip Range: 2.0mm



**RUBBER PINCHWELD, TOP MOUNT  
MEDIUM BUBBLE**

PART NO. 1011-105

BOX QTY: 2 x 50m rolls

► Grip Range: 1.0 - 2.5mm



**RUBBER SEALING, SIDE MOUNT  
LARGE BUBBLE**

PART NO. 1011-A3297

BOX QTY: 2 x 50m rolls

► Grip Range: 2.0mm

## WHY SELECTLOK RUBBER?

**Don't settle for less. Great rubber will leave a long-lasting impression.**

Selectlok rubber products are made from "ethylene propylene diene monomer", also known as EPDM. This extremely versatile synthetic rubber is commonly used for sealing found in outdoor environments because of its hardy and highly resistant properties. It's also lightweight, compressible and easy to die cut making it a cost-effective rubber material for manufacturing.

### FEATURES:

- Withstands max temperatures within the range of -59°C to +149°C
- Resistant to water, air, weather, ozone, and heat
- High silica content gives the rubber better tear strength and fatigue resistance
- Creates 3 points of contact for superior sealing

**Please consult our website or Section 10 in our main catalogue for drawings and measurements.**