1011-A3297-A

- 1011 — Pinchweld Seal & Protection
- A3297 — Extrusion Range
- A — MPN Identifer

NITFT18x3

- NIT — Material
- FT — Foam Tape
- 18 — Tape Width
- 3 — Tape Thickness

RUBBER SEALS, EDGE PROTECTION, FOAM TAPES & GASKETS

Pinchweld Rubber - Top Sealing

- Small Bubble • 6.5mm x 8.5mm
- Medium Bubble • 10.7mm x 11mm
- Medium Bubble *(for Checkerplate)* • 10.7mm x 11mm
- Large Bubble • 18mm x 13mm
- Large Bubble • 20.7mm x 13.2mm

Self-Adheisive Rubber - Top Sealing Tape

- Large Bubble • 18mm x 13mm

Pinchweld Rubber - Side Sealing

- Small Bubble • 9mm x 5.5mm
- Small Bubble • 6.5mm x 8.5mm
- Medium Bubble • 10.7mm x 11mm
- Large Bubble • 15mm x 15mm

Pinchweld Edge Protection - Non Sealing

- Small Profile • 8mm High
- Medium Profile • 9.5mm High
- Large Profile • 14.8mm High

Special Profile Rubbers

- Bull Nose Insertion Strip • Barrier Packing Rubber

Foam Tapes & Gaskets

- Nitrile Rubber • Self-Adheisive Tapes
- EPDM Rubber • Self-Adheisive Tapes
- EPDM Semi-Circular Sealing Strip • Self-Adheisive Tapes

Rear Door Truck Rubber

- H Seal • Grey - 21mm
- J Seal • Grey - 25mm
- Refrigeration Seal • Grey - 84mm
- Corner Tabs • Grey - 80mm x 20mm




Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

PINCHWELD RUBBER

Top Sealing

Small Bubble - 6.5mm x 8.5mm

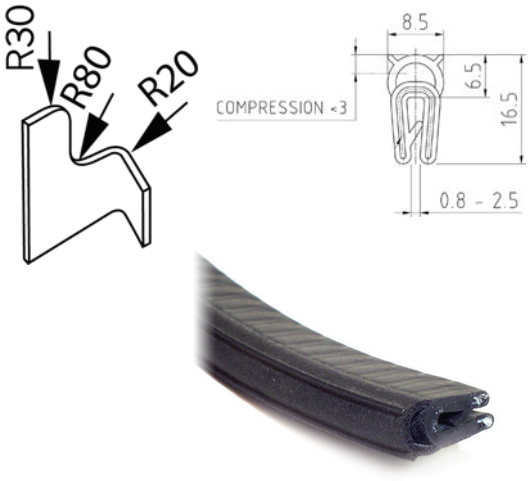

Features


- Three-points of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
PACK-110-07	0.8mm ~ 2.5mm	Cont. 7m Roll (Online Only)
1011-110-A	0.8mm ~ 2.5mm	Cont. 100m Roll

PINCHWELD RUBBER

Top Sealing

Medium Bubble - 10.7mm x 11mm

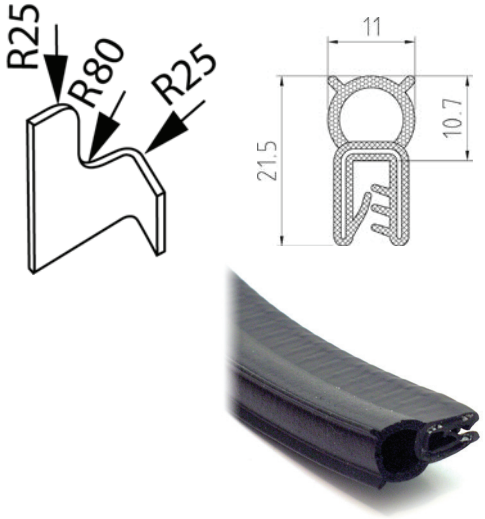

Features

- Three-points of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
PACK-105-07	1mm ~ 3mm	Cont. 7m Roll (Online Only)
1011-105-A	1mm ~ 3mm	Cont. 100m Roll

PINCHWELD RUBBER FOR CHECKERPLATE

Top Sealing

Medium Bubble - 10.7mm x 11mm



Features


- Three-points of contact
- Suits 3mm checkerplate
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
1011-105-C	2.5mm ~ 3.5mm	Cont. 100m Roll

PINCHWELD RUBBER

Top Sealing

Large Bubble - 18mm x 13mm

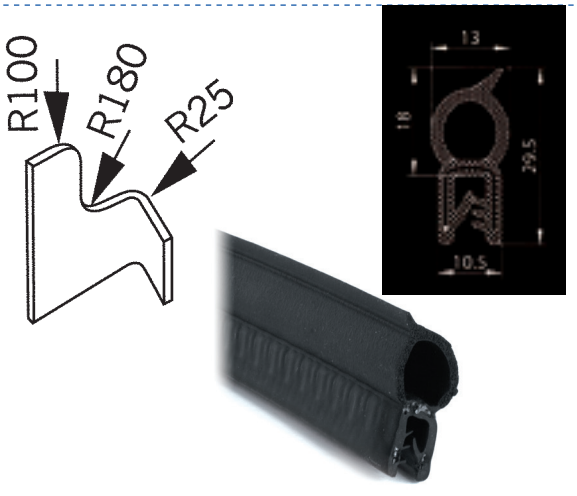

Features

- Two-points of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat


Part No#	Grip Range	Roll Length
1011-A2516-4	2.5mm ~ 4mm	Cont. 50m Roll

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

PINCHWELD RUBBER

Top Sealing

Large Bubble - 20.7mm x 13.2mm





Features


- Single-point of contact
- High-quality sponge rubber
- Glued together on top with sponge rubber bulb

Part No#	Grip Range	Roll Length
1011-A1030-E2583	4mm ~ 6mm	Cont. 50m Roll

SELF-ADHEISIVE RUBBER

Top Sealing Tape

Large Bubble - 13mm x 18mm





Features


- Three-points of contact
- High-quality EPDM
- Acrylic foam tape: 3M ST1200 (density 0.3 +/-0.1g/cm3)


Part No#	Adheisive	Roll Length
9187STS	3M ST	Cont. 50m Roll

PINCHWELD RUBBER

Side Sealing

Small Bubble - 9mm x 5.5mm







Features


- Single-point of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat


Part No#	Grip Range	Roll Length
1011-10212-A	1mm ~ 2mm	Cont. 100m Roll

PINCHWELD RUBBER

Side Sealing

Small Bubble - 8.5mm x 6.5mm







Features

- Three-points of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat


Part No#	Grip Range	Roll Length
PACK-109-07	0.8mm ~ 2.5mm	Cont. 7m Roll (Online Only)
1011-109-A	0.8mm ~ 2.5mm	Cont. 100m Roll

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

PINCHWELD RUBBER

Side Sealing

Medium Bubble - 11mm x 10.7mm

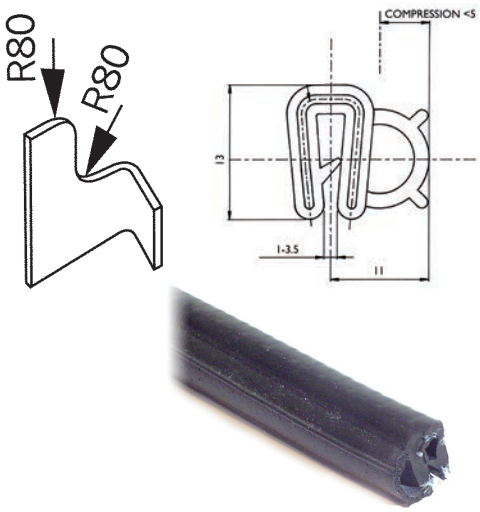

Features


- Three-points of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
PACK-106-07	1mm ~ 2.5mm	Cont. 7m Roll (Online Only)
1011-106-A	1mm ~ 2.5mm	Cont. 100m Roll

PINCHWELD RUBBER

Side Sealing

Large Bubble - 15mm x 15mm

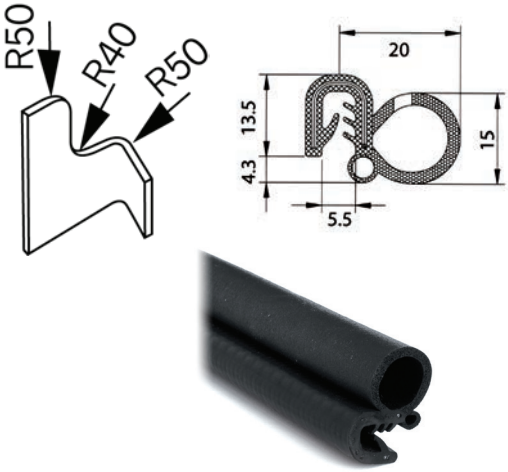

Features


- Single-point of contact
- High-quality EPDM - High silica content, wire carrier
- Temp range: -59°C to +149°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
1011-A3297-A	2mm	Cont. 50m Roll

PINCHWELD EDGE PROTECTION

Non-Sealing

Small Profile - 8mm High

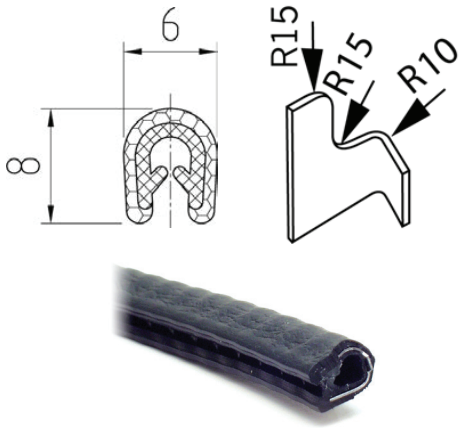

Features


- High-quality PVC - Steel cage carrier
- Temp range: -25°C to +90°C
- Resistant to water, air, weather, ozone & heat

Part No#	Grip Range	Roll Length
PACK-10801-07	0.8mm ~ 1.5mm	Cont. 7m Roll (Online Only)
1011-10801-A	0.8mm ~ 1.5mm	Cont. 100m Roll

PINCHWELD EDGE PROTECTION

Non-Sealing

Medium Profile - 9.5mm High

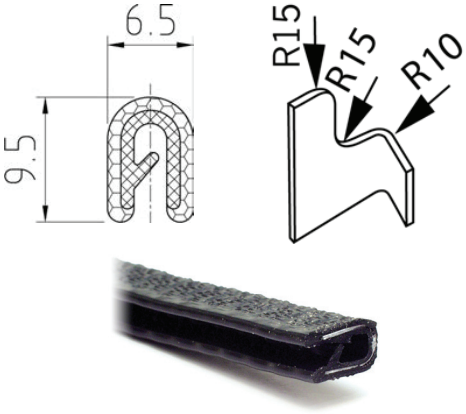

Features

- High-quality PVC - Steel cage carrier
- Temp range: -25°C to +90°C
- Resistant to water, air, weather, ozone & heat

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

PINCHWELD EDGE PROTECTION

Non-Sealing

Medium Profile - 9.5mm High





Part No#	Grip Range	Roll Length
PACK-10802-07	1mm ~ 2mm	Cont. 7m Roll (Online Only)
1011-10802-A	1mm ~ 2mm	Cont. 100m Roll

PINCHWELD EDGE PROTECTION

Non-Sealing

Large Profile - 14.8mm High





Features

- High-quality PVC - Steel cage carrier
- Temp range: -25°C to +90°C
- Resistant to water, air, weather, ozone & heat





Part No#	Grip Range	Roll Length
PACK-10803-07	1mm ~ 4mm	Cont. 7m Roll (Online Only)
1011-10803-A	1mm ~ 4mm	Cont. 100m Roll

PINCHWELD EDGE PROTECTION

Non-Sealing


Large Profile - 17mm High





Features

- High-quality PVC - Steel cage carrier
- Temp range: -25°C to +90°C
- Resistant to water, air, weather, ozone & heat




Part No#	Grip Range	Roll Length
1011-A1018	2mm ~ 4mm	Cont. 50m Roll

SPECIAL PROFILE EXTRUSIONS

Bull Nose Insertion Strip

Barrier Packing Rubber



Features

- High-quality sponge rubber
- Flexible yet strong construction
- Suitable for barriers, edging, and protective applications




Part No#	Extrusion Profile	Roll Length
RSB256	25mm x 6mm	Cont. 50m Roll

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

FOAM TAPES & GASKETS

Nitrile Rubber

Self-Adheisive Tapes

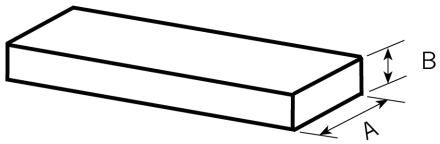



Features

- Filmic interliner prevents stretch during application
- Highly conformable, compresses easily and recovers quickly
- Density: 91kgs/m³
- Water absorption: 6% (by weight)
- Temp range: -10°C to +80°C
- Flammability & thermal conductivity: Flame retardant and self-extinguishing (0.27 btu)
- Electrical non-conductive: Can be used as an electrolysis barrier
- Resistant to water, weather, ozone, heat, UV, chemicals, solvents, petrol & oils
- Alternative sizes (A/B), die-cut pads and gaskets may be available upon request
  (subject to additional costs, MOQs and lead times)


Part No#	A (Dim.)	B (Dim.)	Cont. Roll Length	Material
NITFT6x6-A	6mm	6mm	15m Roll	Closed Cell PVC/Nitrile Foam
NITFT9x12	9mm	12mm	6m Roll	Closed Cell PVC/Nitrile Foam
NITFT10x3-4	10mm	3mm	4m Roll	Closed Cell PVC/Nitrile Foam
NITFT10x3	10mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT10x6	10mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT12x3	12mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT12x6	12mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT12x9	12mm	9mm	8.3m Roll	Closed Cell PVC/Nitrile Foam
NITFT15x3	15mm	3mm	24m Roll	Closed Cell PVC/Nitrile Foam
NITFT15x6	15mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT18x3	18mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT21x3	21mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT21x6	21mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT21x9	21mm	9mm	8.3m Roll	Closed Cell PVC/Nitrile Foam
NITFT24x4.8-A	24mm	4.8mm	15.2m Roll	Closed Cell PVC/Nitrile Foam (Grey)
NITFT25x3	25mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT25x6	25mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT25x9	25mm	9mm	8.3m Roll	Closed Cell PVC/Nitrile Foam
NITFT25x12	25mm	12mm	6m Roll	Closed Cell PVC/Nitrile Foam
NITFT25x25	25mm	25mm	3m Roll	Closed Cell PVC/Nitrile Foam
NITFT32x15	32mm	15mm	7m Roll	Closed Cell PVC/Nitrile Foam
NITFT36x3	36mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT40x3	40mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT48x3-A	48mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT48x5-A	48mm	5mm	15m Roll	Closed Cell PVC/Nitrile Foam
NITFT50x3	50mm	3mm	25m Roll	Closed Cell PVC/Nitrile Foam
NITFT50x6	50mm	6mm	12.5m Roll	Closed Cell PVC/Nitrile Foam
NITFT50x9	50mm	9mm	8.3m Roll	Closed Cell PVC/Nitrile Foam
NITFT60x9	60mm	9mm	8.3m Roll	Closed Cell PVC/Nitrile Foam
NITFT75x25	75mm	25mm	2.5m Roll	Closed Cell PVC/Nitrile Foam

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**

FOAM TAPES & GASKETS

EPDM Rubber

Self-Adheisive Tapes

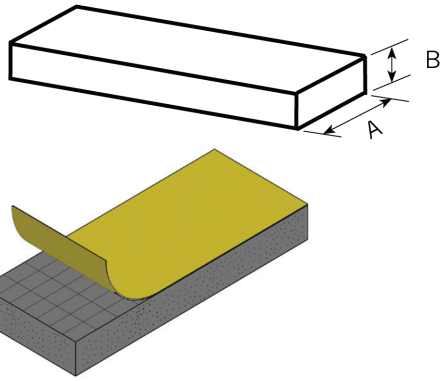

Features


- Scrim netting for better resistance to overstretching
- Density: 130kg/m³
- Water absorption: <8% (by weight)
- Temp range (constant): -40°C to +80°C
- Resistant to water, air, weather, ozone & UV
- Alternative sizes (A/B), die-cut pads and gaskets may be available upon request *(subject to additional costs, MOQs and lead times)*

Part No#	A (Dim.)	B (Dim.)	Cont. Roll Length	Material
EPDMFT9x4.5	9mm	4.5mm	14m Roll	Closed Cell EPDM Foam
M1200-5-10	10mm	5mm	10m Roll	Closed Cell EPDM Foam
EPDMFT12x3	12mm	3mm	24m Roll	Closed Cell EPDM Foam
M1200-3-15	15mm	3mm	10m Roll	Closed Cell EPDM Foam
EPDMFT8x3	18mm	3mm	25m Roll	Closed Cell EPDM Foam
EPDMFT8x4.5	18mm	4.5mm	12m Roll	Closed Cell EPDM Foam
EPDMFT8x12	18mm	12mm	6m Roll	Closed Cell EPDM Foam
EPDMFT20x1.5	20mm	1.5mm	30m Roll	Closed Cell EPDM Foam
M1200-3-20	20mm	3mm	10m Roll	Closed Cell EPDM Foam
M1200-5-20	20mm	5mm	10m Roll	Closed Cell EPDM Foam
EPDMFT20x6	20mm	6mm	12m Roll	Closed Cell EPDM Foam
EPDMFT24x3	24mm	3mm	25m Roll	Closed Cell EPDM Foam
EPDMFT24x6	24mm	6mm	12m Roll	Closed Cell EPDM Foam
EPDMFT24x9	24mm	9mm	6m Roll	Closed Cell EPDM Foam
M1200-5-25	25mm	5mm	10m Roll	Closed Cell EPDM Foam
EPDMFT25x12	25mm	12mm	6m Roll	Closed Cell EPDM Foam
EPDMFT30x1.5	30mm	1.5mm	30m Roll	Closed Cell EPDM Foam
EPDMFT30x4.5	30mm	4.5mm	12m Roll	Closed Cell EPDM Foam
M1200-5-30	30mm	5mm	10m Roll	Closed Cell EPDM Foam
EPDMFT36x3	36mm	3mm	25m Roll	Closed Cell EPDM Foam
EPDMFT36x6	36mm	6mm	12m Roll	Closed Cell EPDM Foam
EPDMFT40x1.5	40mm	1.5mm	30m Roll	Closed Cell EPDM Foam
EPDMFT48x9	48mm	9mm	6m Roll	Closed Cell EPDM Foam

FOAM TAPES & GASKETS

EPDM Semi-Circular Sealing Strip

Self-Adheisive Tapes





Features

- High-quality EPDM beading rubber
- Semi-circular profile (d-shaped) beading rubber
- Self-adheisive backing
- Resistant to water, air, weather, ozone & UV

Part No#	Extrusion Profile	Roll Length
TZ-YN-004	21.5mm x 10.5mm	50m Roll (Cont.)

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**


REAR DOOR TRUCK RUBBER


H Seal

Grey - 21mm

Features

- 21mm H-shaped PVC door seal
- Material colour: Grey
- Extrusion length: 5mtrs. (each)
- Bundle size: 10x lengths per bundle





Part No#	Grip Range	Bundle Size
P-200-21	21mm	50m Bundles (10 x 5m)


REAR DOOR TRUCK RUBBER


J Seal

Grey - 25mm

Features

- 25mm J-shaped PVC door seal
- Material colour: Grey
- Extrusion length: 5mtrs. (each)
- Bundle size: 10x lengths per bundle





Part No#	Grip Range	Bundle Size
183020	25mm	50m Bundles (10 x 5m)


REAR DOOR TRUCK RUBBER


Refrigeration Seal

Grey - 84mm

Features

- 84mm refrigeration PVC door seal
- Material colour: Grey
- Extrusion length: 5mtrs. (each)
- Bundle size: 8x lengths per bundle

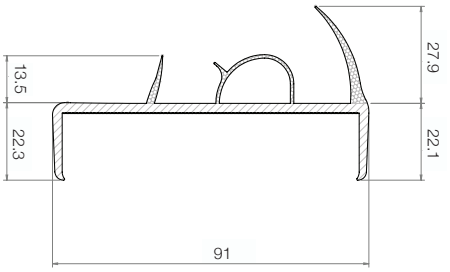



Part No#	Grip Range	Bundle Size
P-6081-B	84mm	40m Bundles (8 x 5m)


REAR DOOR TRUCK RUBBER


Corner Tabs

Grey - 80x20mm

Features

- Chevron-shaped corner tabs
- High-quality PVC door seal
- Material colour: Grey
- Box quantity: 100x pieces

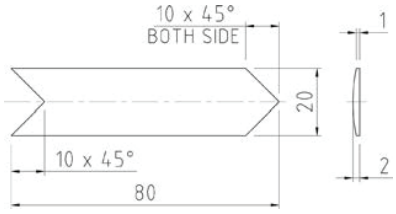



Part No#	Base Dimensions
P2627	80mm x 20mm x 2mm

Please note: The information contained within this document is correct as of time of publication and is subject to change without warning. Selectlok reserves the right to alter designs, dimensions and technical information without notice. **©2026 Selectlok Australia P/L | v2602**